



# JFS45.2

履带迷你自行走折臂吊



## 新型发动机管理系统



- ✓ 精确的运动控制
- ✓ 减少燃料消耗
- ✓ 3种工作模式：环保-正常-动力

## 液压小臂

- ✓ 3000 kg 最大承载
- ✓ 31 m 最大高度
- ✓ 额外油管动力接头



## 载人吊篮

- ✓ 核载 2 人
- ✓ 最大高度 30 m
- ✓ 符合欧标EN280认证



## 专属配置



- ✓ 3,5 吨可拆卸配重
- ✓ 3,5 吨运载能力
- ✓ 带载行走能力
- ✓ 10 吨前后液压拖缆绞车

## 主臂参数



- ✓ 15,5 吨 最大承载
- ✓ 18,8 m 最大高度
- ✓ 6 节液压折叠伸缩臂

## 绞盘



- ✓ 最大长度 60 m
- ✓ 3 组滑轮
- ✓ 主臂小臂通用
- ✓ 2/3 吨 单绳最大承载

## 附属电动系统



- ✓ 随车搭载
- ✓ 50 Hz / 60 Hz
- ✓ 柴 - 电 快速切换
- ✓ 400-480 V 三相电机

## 360° 回转范围


## 新型悬臂液压系统

- ✓ 5 个不同的水平高度
- ✓ 4 个不同的工作区域
- ✓ 0 - 45° 全范围变幅&伸缩





## 负载分布图

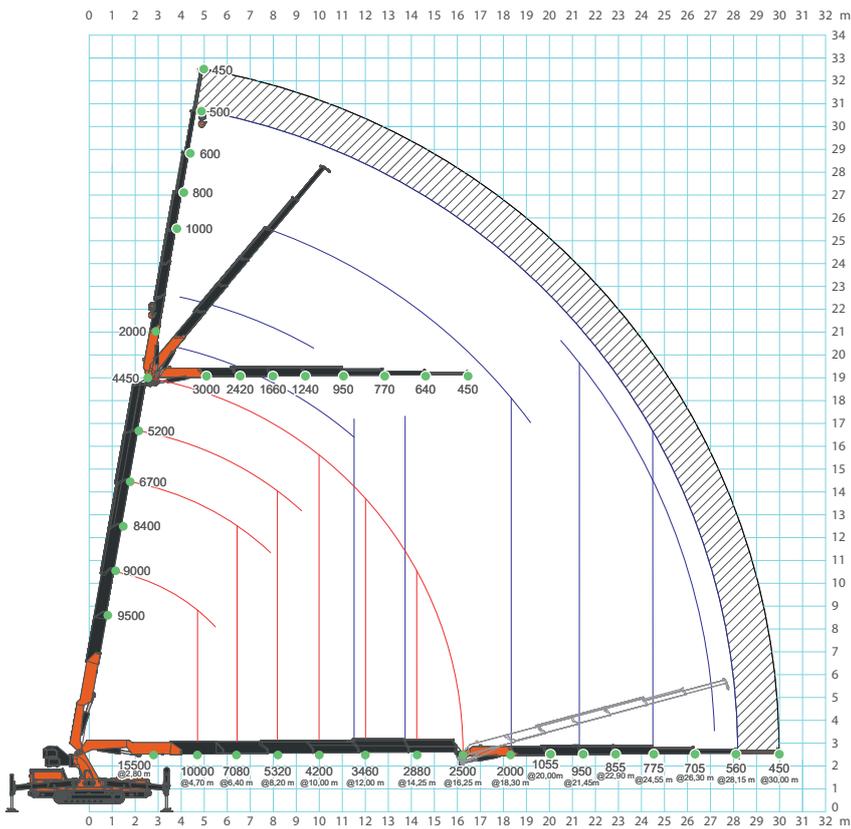


扫描二维码  
获取更多信息




	Kg
JF545.2	13730
配重	3500
液压小臂	1140



## 外形尺寸 (mm)

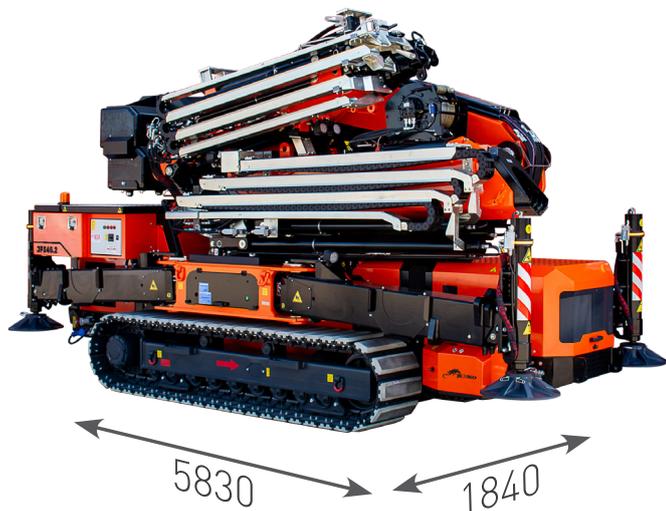

## 支腿覆盖区域 (mm)

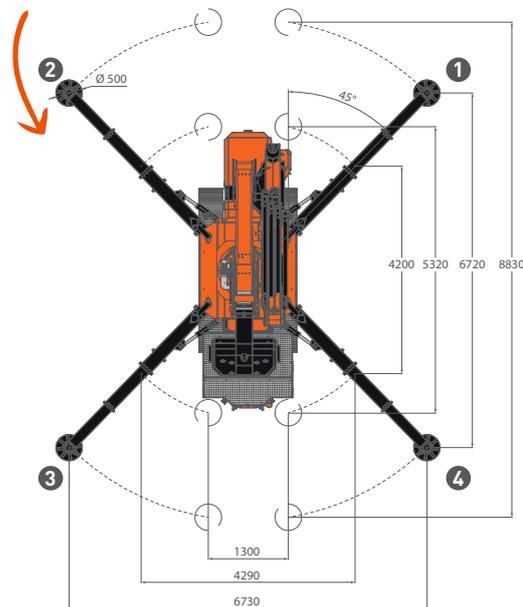

## 配套工作装置

**JVM800-R**  
800 kg 玻璃吸盘

**JIB3000.6HA**  
3000 kg 液压小臂

**载人吊篮**  
核载2人

