

### 无线遥控系统

- ✓ 丰富操作功能
- ✓ 线性比例控制
- ✓ LCD 显示器
- ✓ 车载备用电池
- ✓ 报警&故障诊断



### 液压小臂

- ✓ 挂钩与绞盘模式
- ✓ 1500 kg 最大承载
- ✓ 26,7 m 最大高度
- ✓ 随车收纳&简易安装



### 主臂参数



- ✓ 8 吨 最大承载
- ✓ 19,7 m 最大高度
- ✓ 4 组液压链条伸缩
- ✓ 高阻钢材

### 锂电池动力单元



- ✓ 96 V, 400 Ah
- ✓ 充电时可作业
- ✓ 三相 20 kW 电机

### 专属配置



- ✓ 虚拟墙壁功能
- ✓ 360° 2000 kg 带载行走能力
- ✓ 全部配件随车搭载
- ✓ 自诊断系统
- ✓ 可调速变量泵

### 绞盘




- ✓ 125 m 钢缆
- ✓ 1500 kg 单绳承载
- ✓ 6 组滑轮
- ✓ 车载滑轮配件

### 360° 连续回转

### 支腿系统

- ✓ 5 个独立稳定区
- ✓ 自主平衡系统
- ✓ 0 - 45° 全范围变幅&伸缩




### 履带配置

- ✓ 液压可调悬挂
- ✓ 白色/黑色履带可选





## 负载分布图

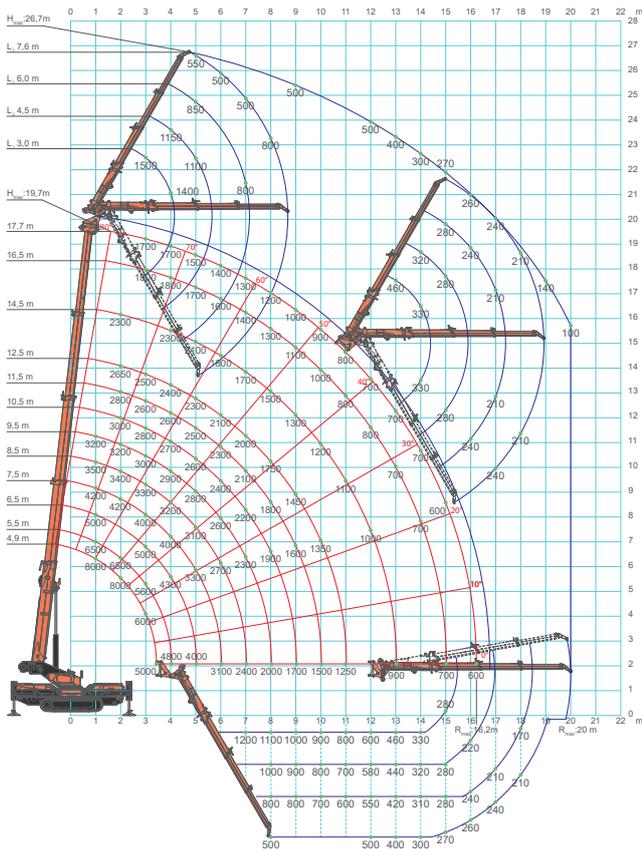

扫描二维码  
获取更多信息




Kg	
SPX1280	9400*
液压小臂	675


\* 包含1,5 t 配重



## 外形尺寸 (mm)

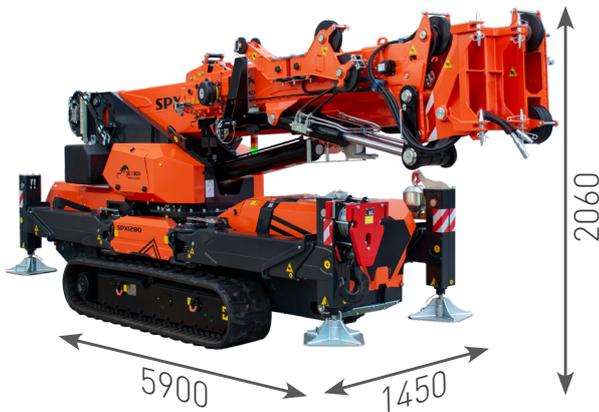

## 支腿覆盖区域 (mm)

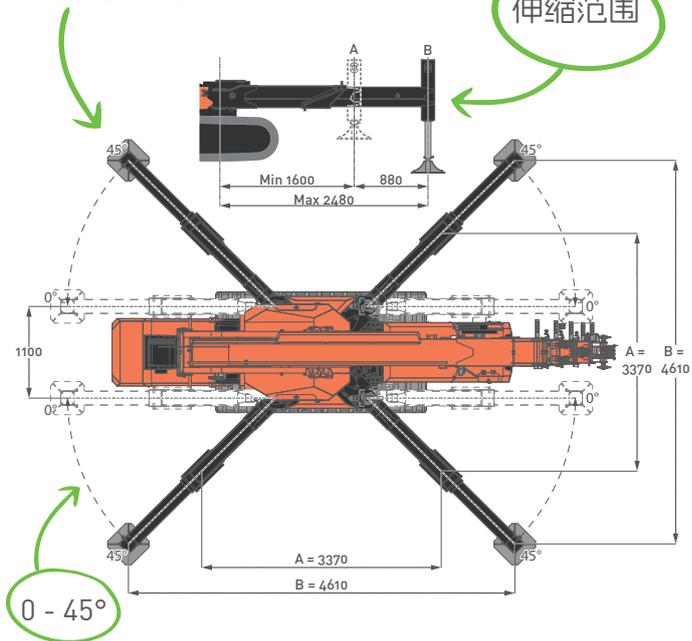

## 配套工作装置

**JVM800-R**  
800 kg 玻璃吸盘



**1,5 吨液压小臂**  
随车收纳



**拓展小臂**  
3,5 吨吊钩 / 3 吨滑车



**拓展臂架**

1500 kg 最大承载