

无线遥控系统



- ✓ 丰富操作功能
- ✓ 线性比例控制
- ✓ LCD 显示器
- ✓ 车载备用电池
- ✓ 报警&故障诊断

液压小臂

- ✓ 挂钩与绞盘模式
- ✓ 1 吨 最大承载
- ✓ 17,3 m 最大高度
- ✓ 随车收纳&简易安装



专属配置



- ✓ 400 kg 带载行走能力
- ✓ 虚拟墙壁功能
- ✓ 自诊断系统
- ✓ 全部配件随车搭载
- ✓ 可调速变量泵

绞盘



- ✓ 800 kg 单绳承载
- ✓ 125 m 钢缆
- ✓ 4 组滑轮
- ✓ 车载滑轮配件

主臂参数



- ✓ 3,2 吨 最大承载
- ✓ 12 m 最大高度
- ✓ 4 组液压链条伸缩
- ✓ 高阻钢材
- ✓ 挂钩与绞盘模式

360° 连续回转




锂电池动力单元

- ✓ 48 V, 210 Ah
- ✓ 220 V 充电时可作业
- ✓ 三相 7 kW 电机
- ✓ 400 V 外部电池充电器


支腿系统

- ✓ 1250 种不同的预配置
- ✓ 4 个独立稳定区
- ✓ 自主平衡系统




履带配置

- ✓ 白色/黑色履带可选
- ✓ 45° 液压可调悬挂

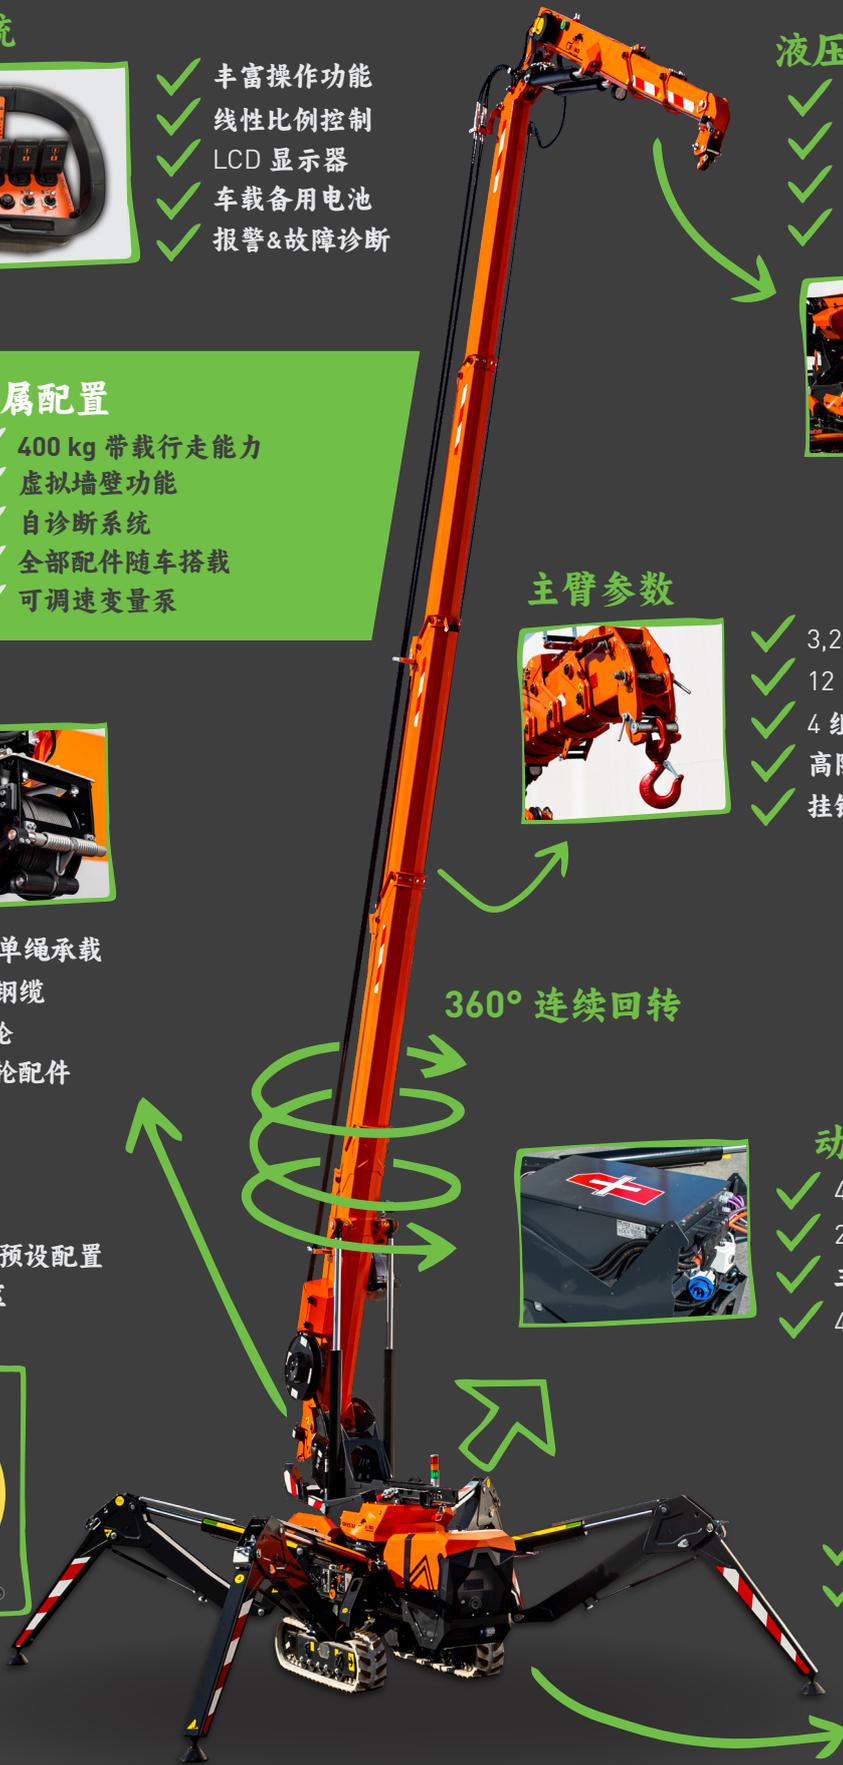



负载分布图

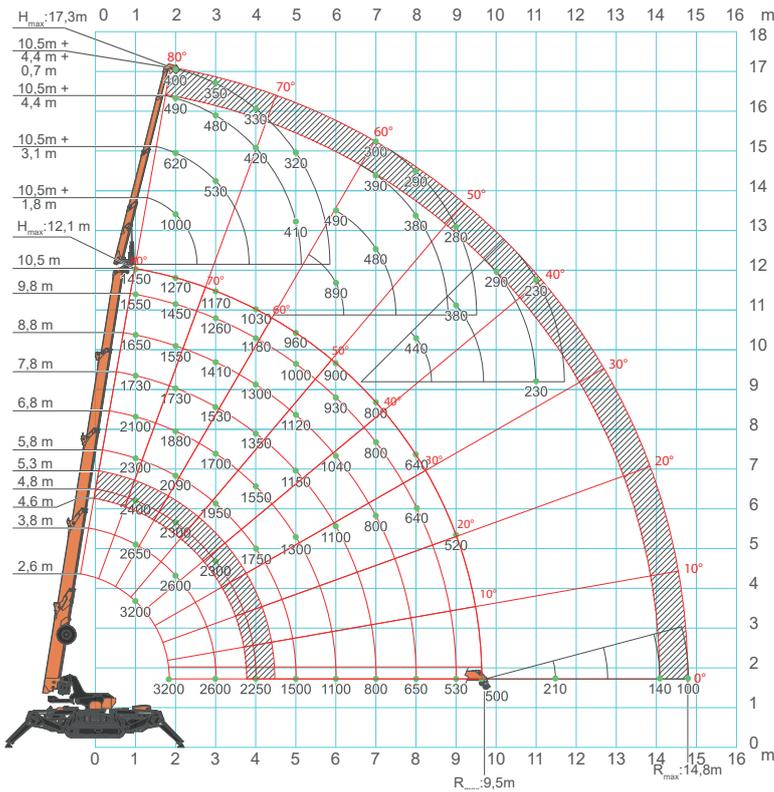


扫描二维码
获取更多信息




	Kg
SPX532	2520
液压小臂	210
绞盘	52



外形尺寸 (mm)

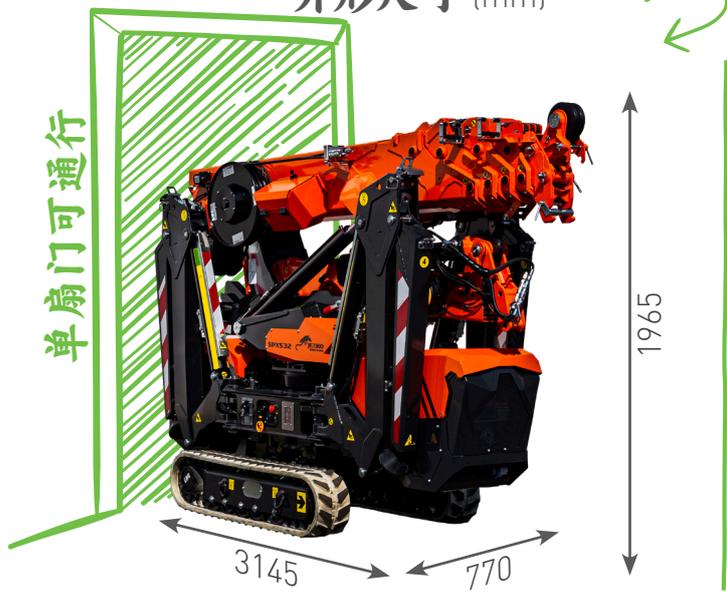

支腿覆盖区域 (mm)

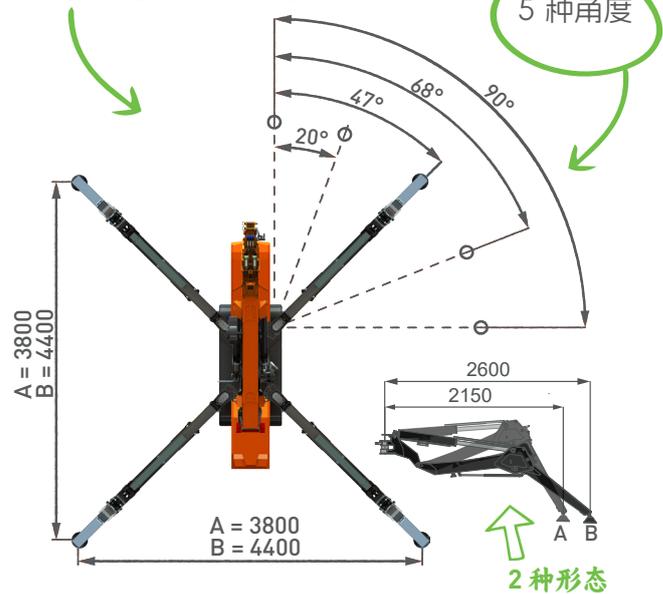

配套工作装置

JVM800-R
800 kg 玻璃吸盘

JIB500GR
500 kg 横梁机械手

1,2 吨 拓展小臂
随车收纳



1 吨液压小臂
随车收纳